



## Technical Service BULLETIN

January 30, 2006

Title:

# FRONT LICENSE PLATE INSTALLATION DURING PDS

Models:

'07 FJ Cruiser

PD012-06

PRE-DELIVERY SERVICE

**Introduction** Follow the procedure below to install the front license plate on 2007 model year FJ Cruiser vehicles.

**Applicable Vehicles**

- 2007 model year **FJ Cruiser** vehicles.

### Parts Information


PREVIOUS PART NUMBER	CURRENT PART NUMBER	PART NAME	QTY
00473-00001	Same	Kit, Self-tapping Screw	1

### Installation Procedure

1. Align the installation holes of the front license plate with the dimples of the front bumper.
2. Install two (2) self-tapping screws through the license plate and into the front bumper at the dimples.

#### NOTE:


- Do **NOT** drill holes into the bumper.
- Do **NOT** overtighten the screws.

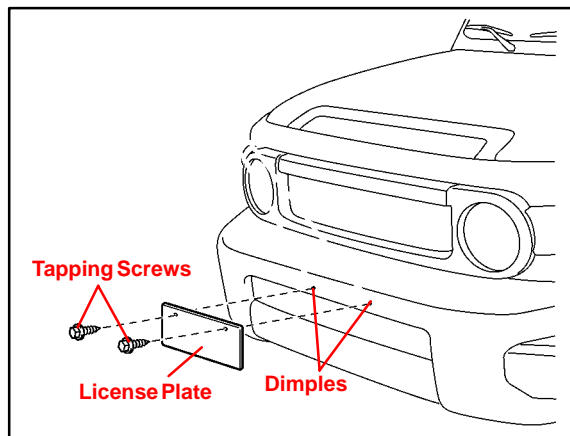

Use self-tapping screws of a non-corroding type with the following dimensions:

**Nominal Length: 15.0 – 20.0 mm**  
(0.59 – 0.79 in.)

**Diameter: 6.0 mm (0.24 in.)**

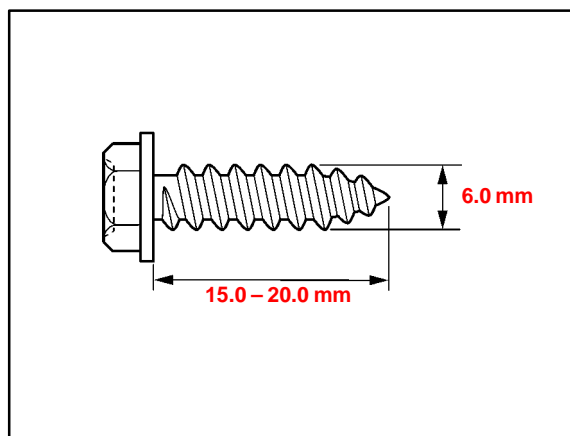

### Warranty Information

OP CODE	DESCRIPTION	TIME	OFP	T1	T2
N/A	Not Applicable to Warranty	—	—	—	—



Toyota Supports ASE Certification